


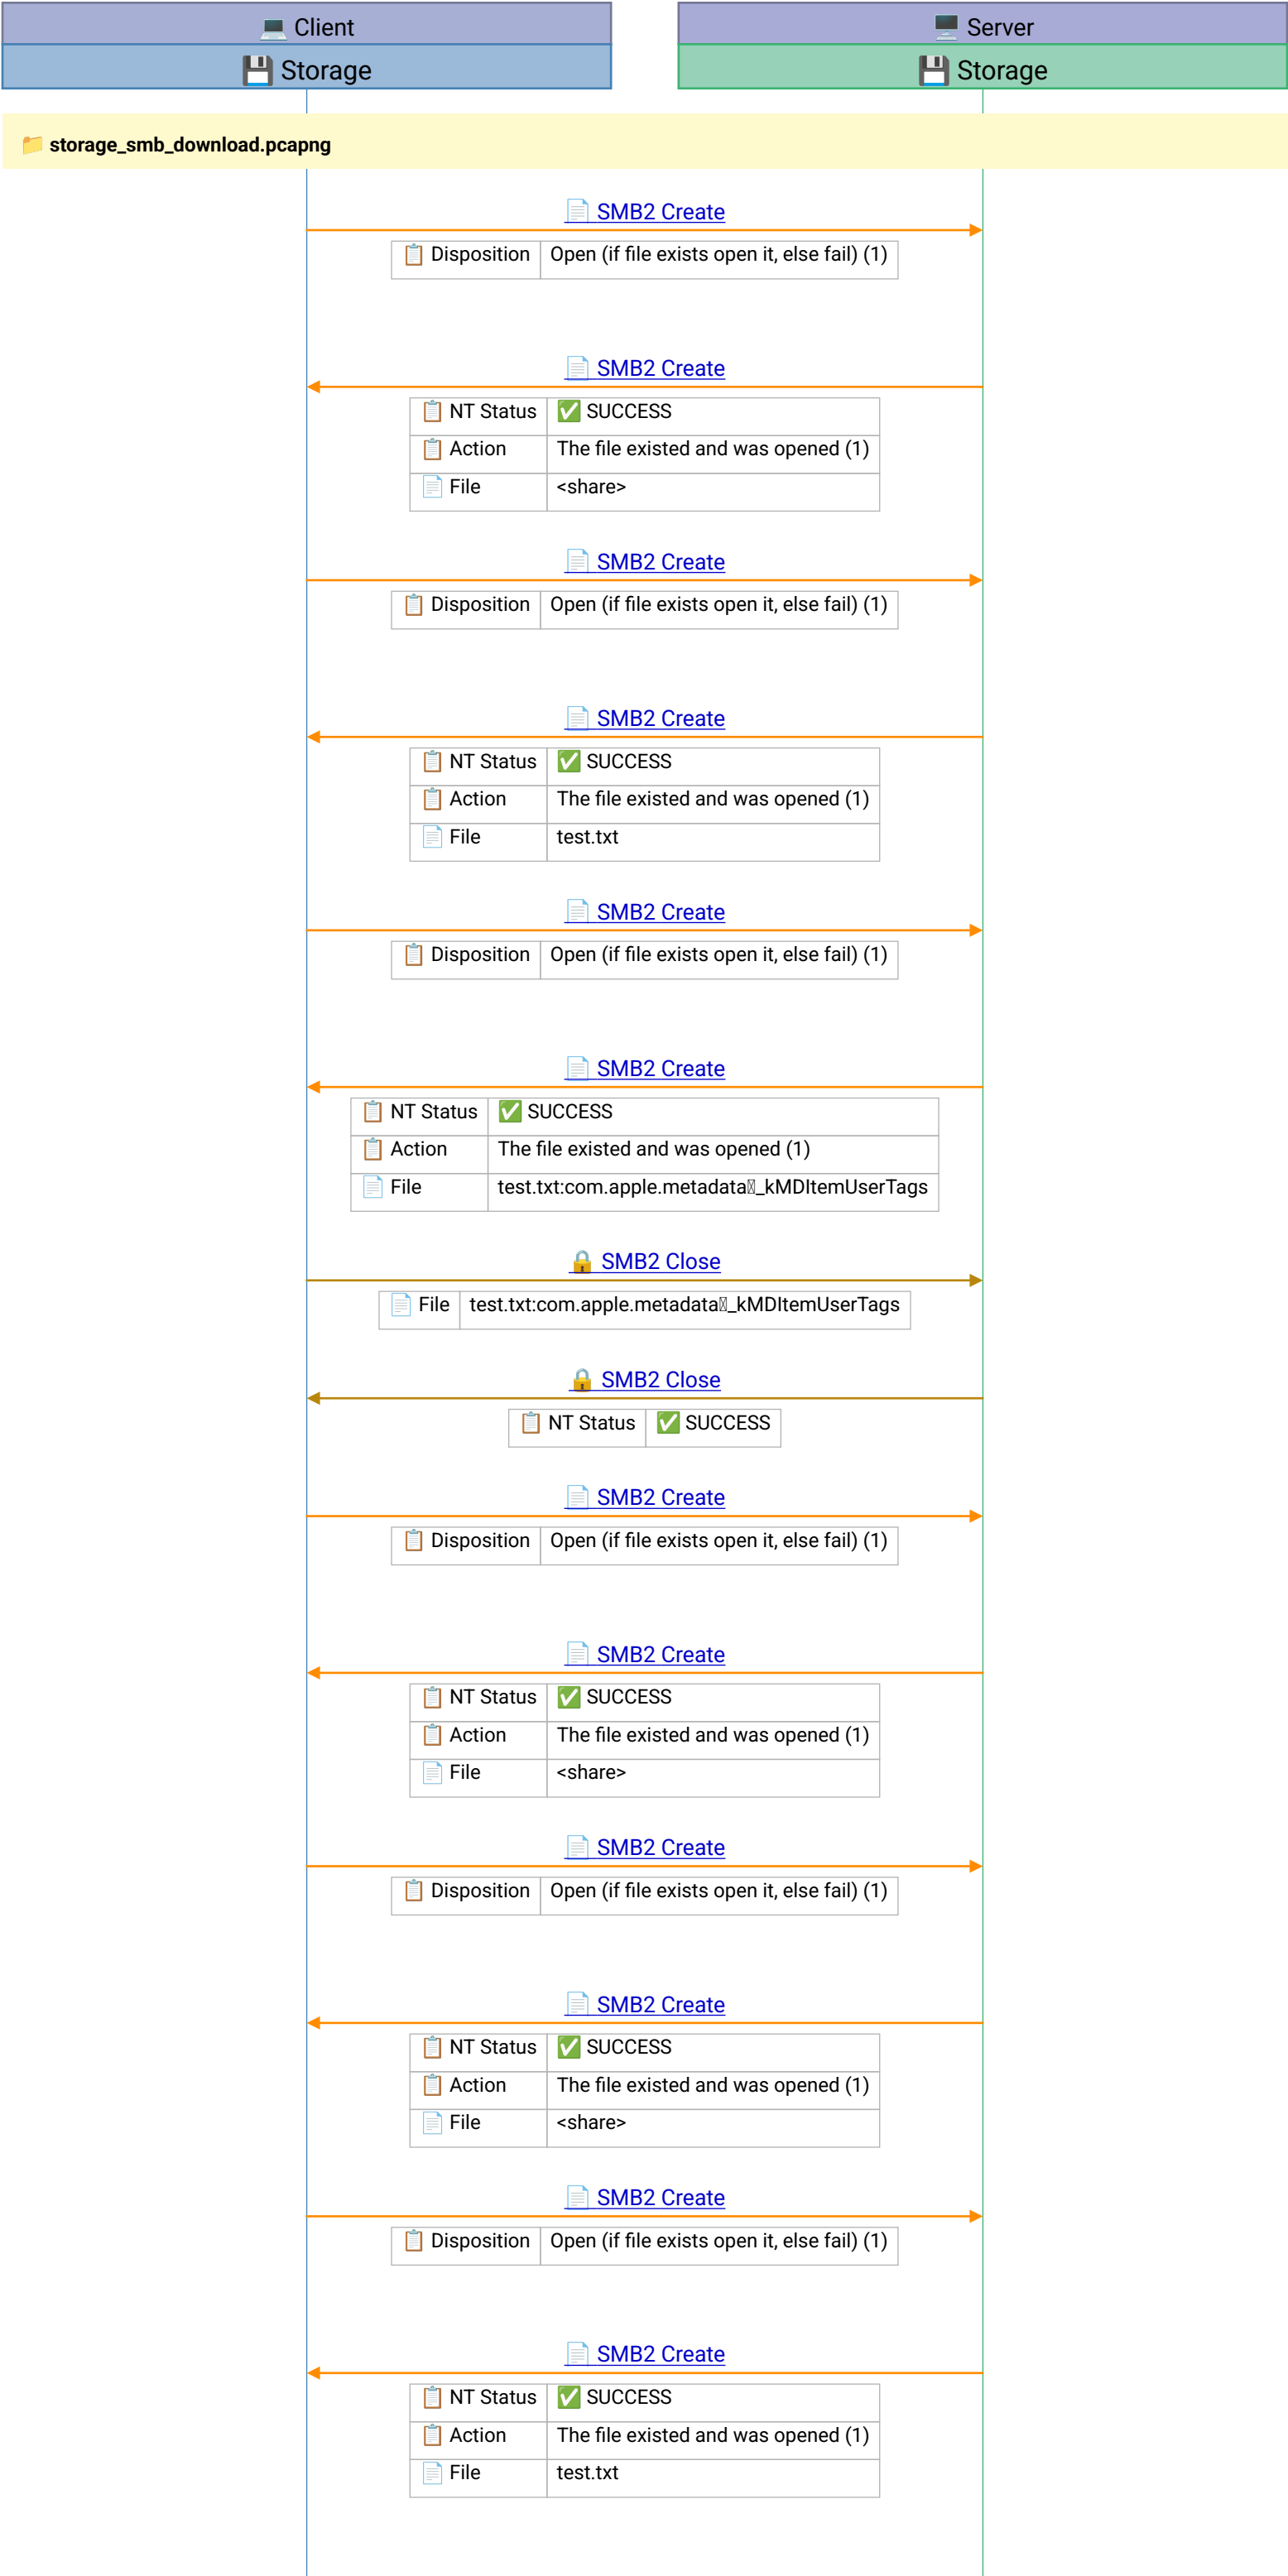

SMB2 Create

Disposition

Open (if file exists open it, else fail) (1)

SMB2 Create

NT Status

SUCCESS

Action

The file existed and was opened (1)

File

test.txt:com.apple.metadata:\_kMDItemUserTags

SMB2 Close

File

test.txt:com.apple.metadata:\_kMDItemUserTags

SMB2 Close

NT Status

SUCCESS

SMB2 Create

Disposition

Open (if file exists open it, else fail) (1)

SMB2 Create

NT Status

SUCCESS

Action

The file existed and was opened (1)

File

<share>

SMB2 Create

Disposition

Open (if file exists open it, else fail) (1)

SMB2 Create

NT Status

SUCCESS

Action

The file existed and was opened (1)

File

<share>

SMB2 Create

Disposition

Open (if file exists open it, else fail) (1)

SMB2 Create

NT Status

SUCCESS

Action

The file existed and was opened (1)

File

test.txt

💡 [Frame 1] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

💡 [Frame 2] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

💡 [Frame 3] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

💡 [Frame 4] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

💡 [Frame 5] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

💡 [Frame 6] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

Frame 7 | 2020-09-21T13:35:41.298008Z

Frame 8 | 2020-09-21T13:35:41.298375Z

💡 [Frame 9] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

💡 [Frame 10] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

💡 [Frame 11] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

💡 [Frame 12] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

💡 [Frame 13] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

💡 [Frame 14] SMB2 Create — opens or creates a file/directory; disposition controls behavior: Open (must exist), Create (must not exist), Overwrite, OpenOrCreate

